




For occasionally trafficked pavements

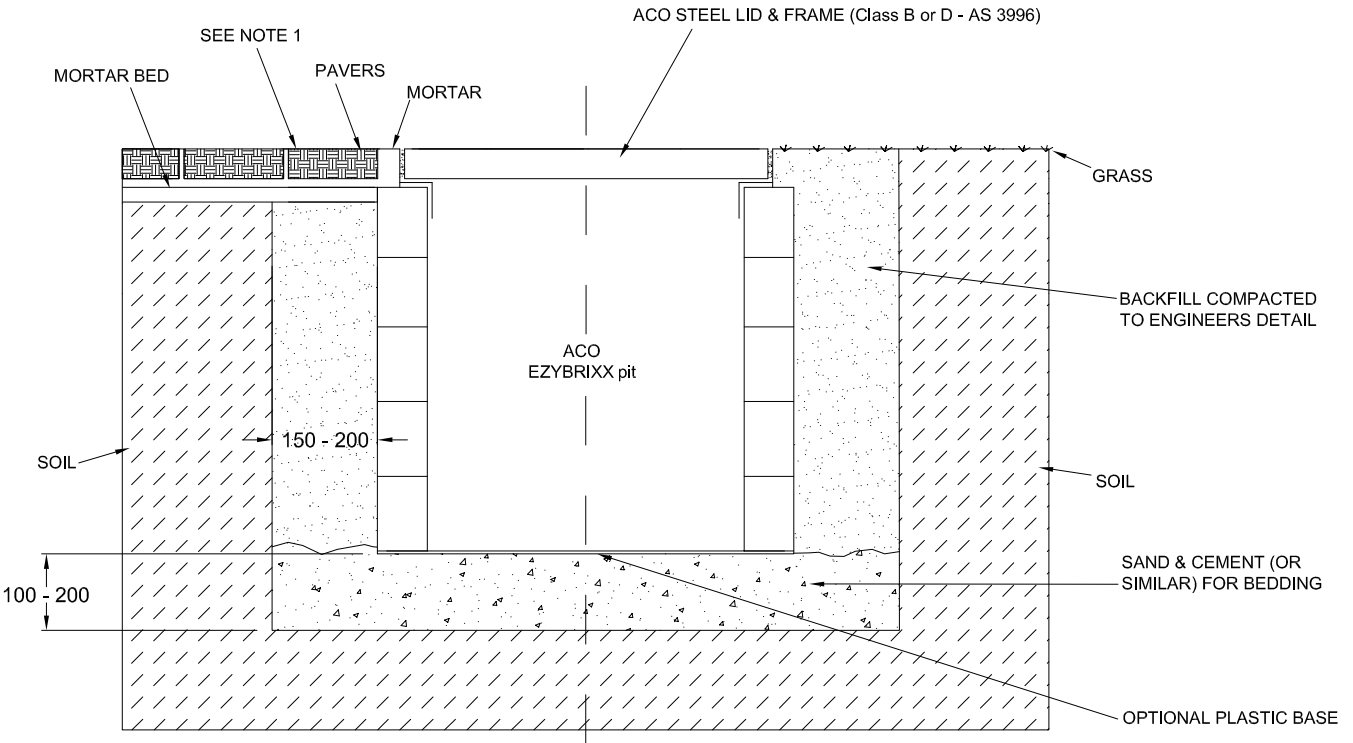

NOTES:

1. The finished floor level must be flush with the top of the frame. Pavers adjacent to pit wall must be restrained from movement .
2. Not recommended for roads.

ACO Pty Ltd
134-140 Old Bathurst Road
Emu Plains NSW 2750
Tel: +61 2 4747 4000
Fax: +61 2 4747 4040
E: technical@acoaus.com.au

The cable enclosure(s) with a clear opening(s) of shall be **ACO EzyBrixx pit(s) size (s) and/or part no.(s)** with ACO Steel Lid & Frame assembly part no.(s)

All materials and components within the scope of the system shall be obtained from ACO Pty Ltd and the work shall be carried out as specified in accordance with the manufacturer's installation recommendations.