




Galvanised lid with chain - 25 tonne rated

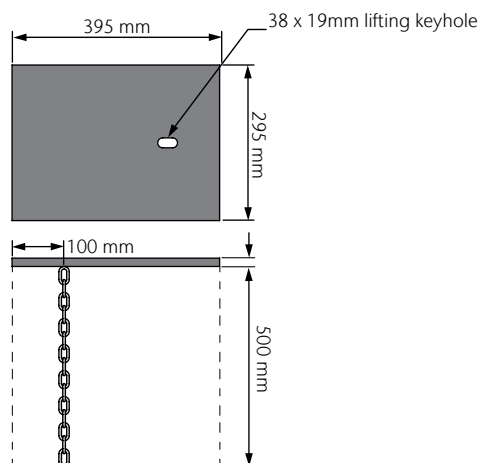

Shallow SIT Pit Collar

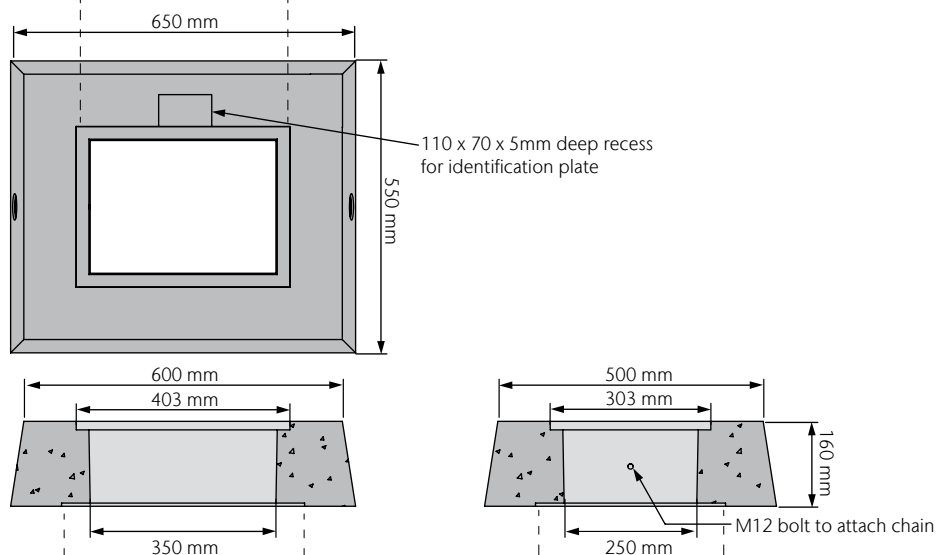

Shallow SIT Pit Base

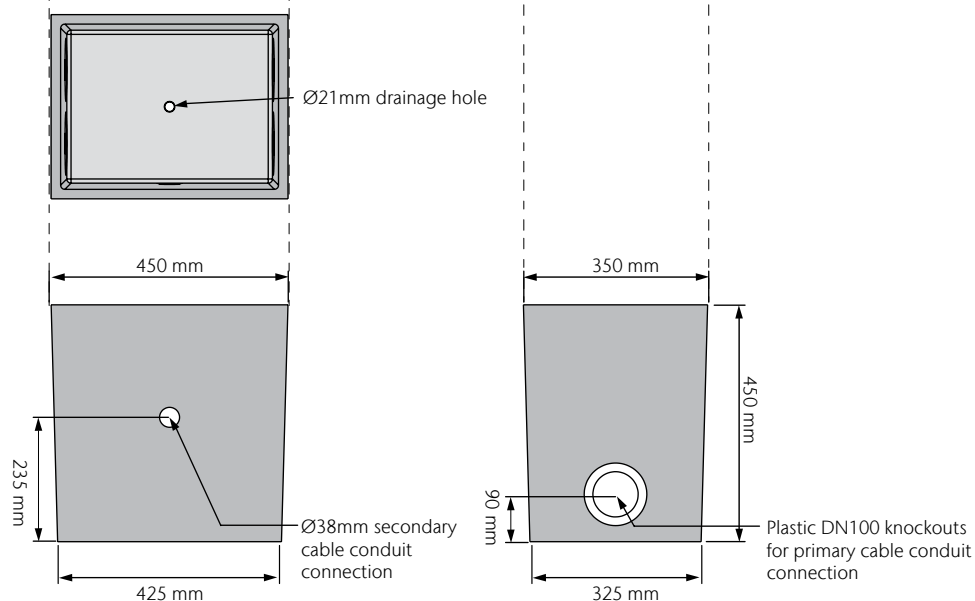

ACO CABLEMATE


SIT Pit Assembly - Shallow SIT Pit with Shallow Collar

Cable pit, collar and lid

Description	Part No	Overall Length (mm)	Overall Width (mm)	Depth (mm)	Weight (kg)
SIT Pit Shallow Base (450mm deep)	142320	450	350	610*	25
SIT Pit Shallow Collar & Lid Assembled	142322	650	550		100
SIT Pit Support Stand	142319	230	200		4
Total assembly (inc.3 parts above)	143122	450	350	610*	129

* Overall height of combined parts

SIT Pit Support Stand

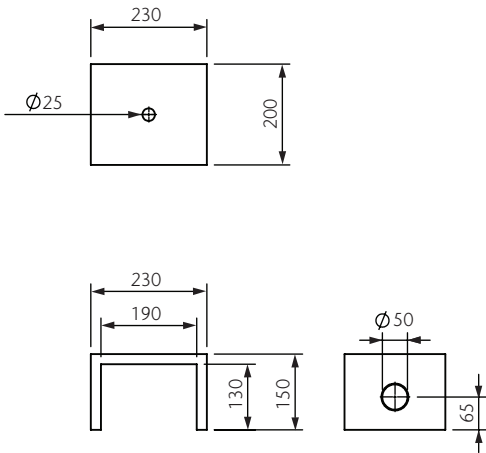

Specifications

General
 The cable pit shall be ACO SIT Pit - polymer concrete pit with steel lid as supplied by ACO Pty Ltd. or equal approved.

Materials
 The pit body shall be manufactured from polymer concrete with:

Electrical resistivity 1 x 10⁸ Ω /sq
 Compressive strength: 96MPa
 Flexural strength: 27MPa
 Water absorption 0.07%
 Frost proof
 Salt proof
 Dilute acid and alkali resistant
 Surface burn characteristics of the material shall comply with UL 723

The nominal clear opening shall be 250mm x 350mm. Units shall be manufactured with a overall depth of 610mm.

Lid
 The pit shall be covered with a steel lid rated to 25 tonnes.

Installation
 The pit shall be installed in accordance with the manufacturer's installation instructions and recommendations.

* delete as applicable