


Type 52 polymer concrete cable pit

Cable pit

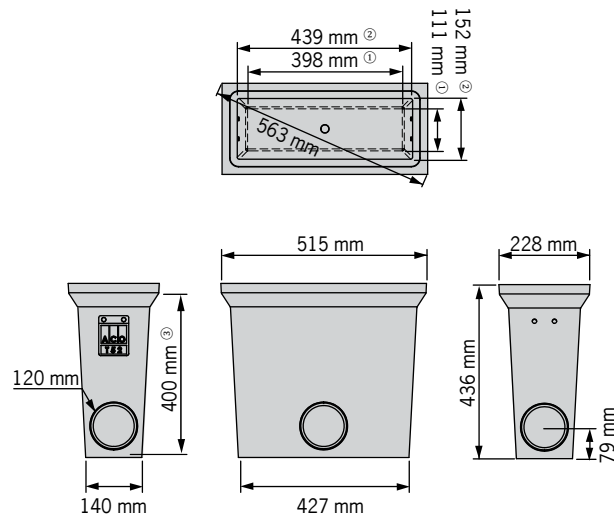

Key

- ① Clear working dimension at pit base
- ② Clear working dimension at pit opening
- ③ Clear working dimension beneath rebate

Type 52 polymer concrete cable pit

Cable pit and riser

Description	Part No.	Depth mm	Weight kg
Type 52 polymer concrete pit	74651	436	21.7

Compatible lids and access covers

Description	Part No.	Weight kg	
		cover ²	total
Polymer concrete lid (AS 3996 Cl A) - Blank ^{1 3}	74675	5	5
Polymer concrete lid (AS 3996 Cl A) - Communications ^{1 3}	74682	5	5
Polymer concrete lid (AS 3996 Cl A) - Electricity ^{1 3}	74696	5	5
Steel lid (AS 3996 Cl B) ^{1 4}	75220	3	3
Steel Tilemate infill cover (AS 3996 Cl B) ¹	80150	8	13
Steel Pavermate infill cover (AS 3996 Cl B) ¹	80151	8	13
Ductile iron Rhinocast infill cover (AS 3996 Cl B) ¹	85014	22	40
Ductile iron Rhinocast solid top cover (AS 3996 Cl B) ¹	85249	22	44
Ductile iron Rhinocast infill cover (AS 3996 Cl C) ¹	142313	30	63
Ductile iron Rhinocast infill cover (AS 3996 Cl D) ¹	143029	35	70
Ductile iron Rhinocast solid top cover (AS 3996 Cl D) ¹	143041	35	70
Ductile iron Rhinocast infill cover (AS 3996 Cl G) ¹	87016	86	149

- 1. Refer to ACO Cablemate literature for details
- 2. Lifting weight - kg
- 3. Lid dimension: 470 x 188 x 20 (mm)
- 4. Lid dimension: 470 x 185 x 18 (mm)

Specifications

General
The cable pit shall be ACO Cablemate Type 52 with lid/access cover* (see below) as manufactured by ACO Pty Ltd. or equal approved.

Materials
The pit/riser bodies shall be manufactured from polyester polymer concrete with:

Electrical resistivity 1 x 10⁸ Ω/sq
Compressive strength: 96MPa
Flexural strength: 27MPa
Water absorption 0.07%
Frost proof
Salt proof
Dilute acid and alkali resistant
Surface burn characteristics of the material shall comply with UL 723

The nominal clear opening shall be 439mm x 152mm. Units shall be manufactured with a clear depth of 400mm.

Lid/Access cover
The pit shall be covered with a polymer concrete lid*, steel lid*, Tilemate/ Pavermate access cover*, Rhinocast access cover* - see table for compatible options.

Installation
The cable pit shall be installed in accordance with the manufacturer's installation instructions and recommendations.

* delete as applicable

ACO Pty Ltd
Australia
Ph: 1300 765 226
www.acoaus.com.au
sales@acoaus.com.au

© November 2024 ACO Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Pty Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.

