



# Type 66 polymer concrete cable pit

## Cable pit

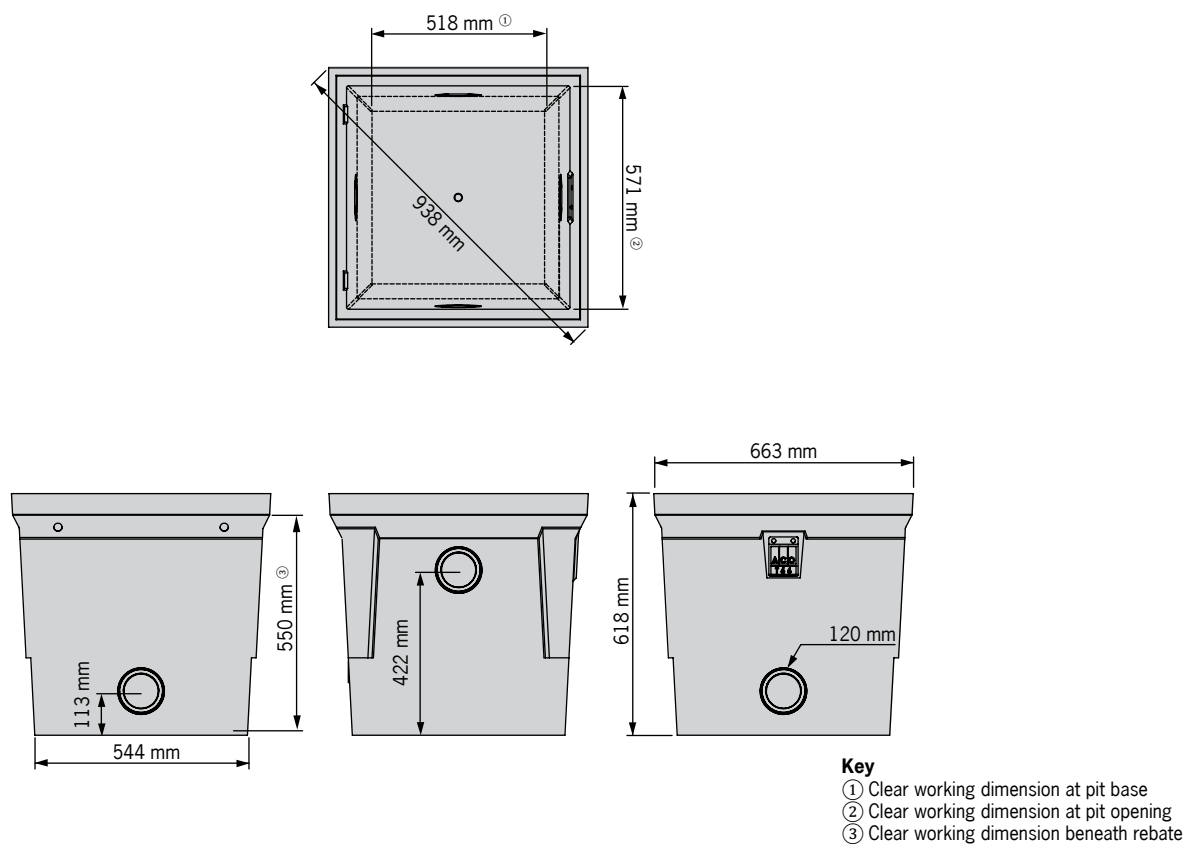

**Optional riser** - each riser adds up to 300mm height

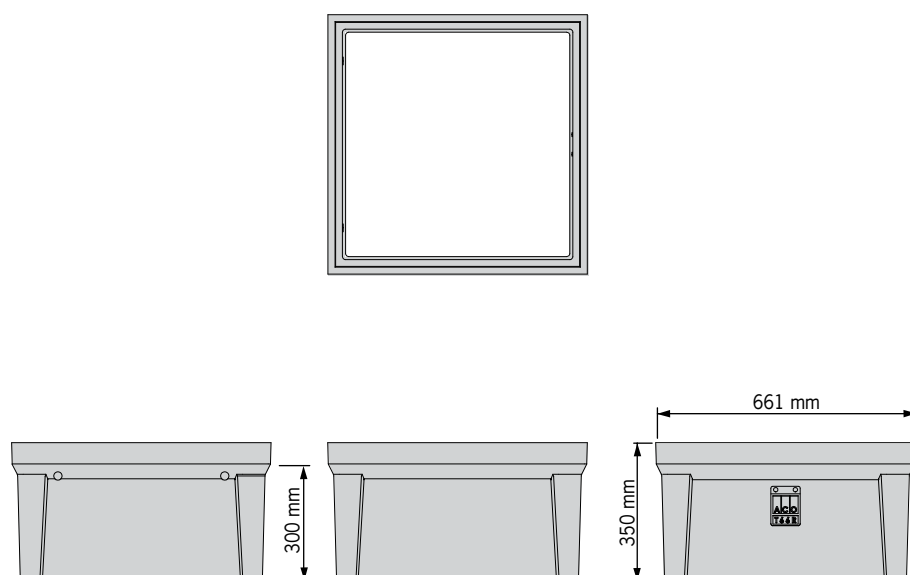

Type 66 polymer concrete cable pit

Cable pit and riser

Description	Part No.	Depth mm	Weight kg
Type 66 polymer concrete pit	75105	618	72.2
Accessories			
Type 66 polymer concrete riser (adds 300mm to pit depth)	75126	350	38.3

Compatible lids and access covers

Description	Part No.	Weight kg	
		cover <sup>2</sup>	total
Polymer concrete lid (AS 3996 Cl A) - Blank <sup>1 3</sup>	75149	24	24
Polymer concrete lid (AS 3996 Cl A) - Communications <sup>1 3</sup>	75154	24	24
Polymer concrete lid (AS 3996 Cl A) - Electricity <sup>1 3</sup>	75160	24	24
Steel lid (AS 3996 Cl B) <sup>1 4</sup>	76620	17	17
Steel PowerLok lid (AS 3996 Cl B) <sup>1 4</sup>	76630	22	22
Steel Tilemate infill cover (AS 3996 Cl B) <sup>1</sup>	81565	15	22
Steel Pavermate infill cover (AS 3996 Cl B) <sup>1</sup>	81948	18	24
Ductile iron Rhinocast infill cover (AS 3996 Cl B) <sup>1</sup>	85045	37	59
Ductile iron Rhinocast solid top cover (AS 3996 Cl B) <sup>1</sup>	85222	39	63
Ductile iron Rhinocast infill cover (AS 3996 Cl C) <sup>1</sup>	142314	56	98
Ductile iron Rhinocast infill cover (AS 3996 Cl D) <sup>1</sup>	143032	57	102
Ductile iron Rhinocast solid top cover (AS 3996 Cl D) <sup>1</sup>	143044	57	102
Ductile iron Rhinocast infill cover (AS 3996 Cl G) <sup>1</sup>	143015	93	156
Ductile iron Rhinocast solid top cover (AS 3996 Cl G) <sup>1</sup>	143022	95	158

- 1. Refer to ACO Cablemate literature for details
- 2. Lifting weight - kg
- 3. Lid dimension: 618 x 618 x 50 (mm)
- 4. Lid dimension: 620 x 620 x 48 (mm)

Specifications

General  
The cable pit shall be ACO Cablemate Type 66 with lid/access cover\* (see below) as manufactured by ACO Pty Ltd. or equal approved.

Materials  
The pit/riser bodies shall be manufactured from polyester polymer concrete with:

Electrical resistivity 1 x 10<sup>8</sup> Ω/sq  
Compressive strength: 96MPa  
Flexural strength: 27MPa  
Water absorption 0.07%  
Frost proof  
Salt proof  
Dilute acid and alkali resistant  
Surface burn characteristics of the material shall comply with UL 723

The nominal clear opening shall be 571mm x 571mm. Units shall be manufactured with a clear depth of 550mm.

Optional riser  
Additional height can be added using one or two polymer concrete riser units - each riser adds up to 300mm height.

Lid/Access cover  
The pit shall be covered with a polymer concrete lid\*, steel/PowerLok lid\*, Tilemate/Pavermate access cover\*, Rhinocast access cover\* - see table for compatible options.

Installation  
The cable pit shall be installed in accordance with the manufacturer's installation instructions and recommendations.

\* delete as applicable

ACO Pty Ltd  
Australia  
Ph: 1300 765 226  
www.acoaus.com.au  
sales@acoaus.com.au

© November 2024 ACO Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Pty Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.

