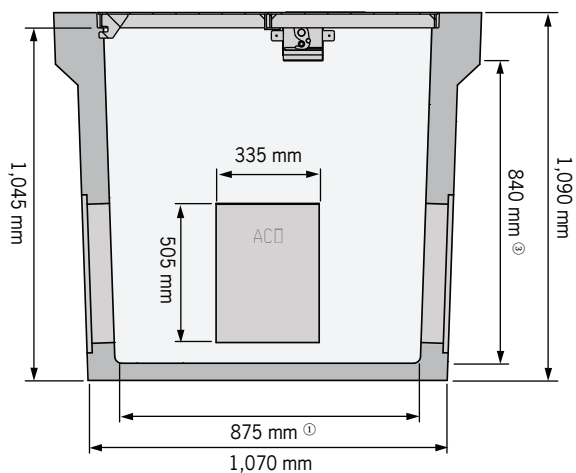
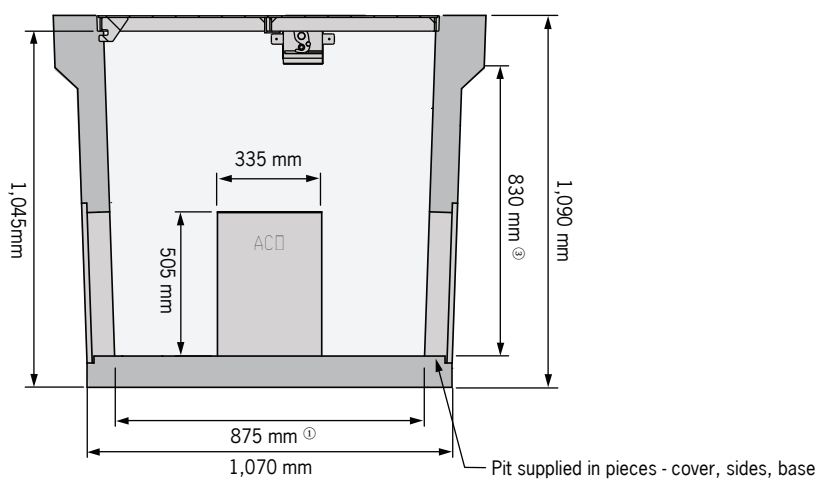
**Cable pit - full body****Cable pit - split body****Key**

- ① Clear working dimension at pit base
- ② Clear working dimension at pit opening
- ③ Clear working dimension beneath lid

J1000C - ACO COVERCOM® SCEC (SL2) - concrete pit & steel lid

Cable pits and lids

Description	Part No.	SEEPL Code	Internal Opening L x W x D (mm)	Weight (kg)
J1000C - full body pit only	142281	-	945 x 945 x 840	1162
J1000C - split body pit only	142282	-	945 x 945 x 830	1198
P1000C - steel lid (Class D)	143133	J1000C		115

Accessories & ancillary items

Description	Part No.	Weight (kg)
Lid Lifting Tool	142232	0.5
ID Plates	On Enquiry	N/A
Route Marker Plates	On Enquiry	N/A
SCEC (SL3) Padlocks	On Enquiry	0.5
Swing Arm	On Enquiry	1
SCEC (SL2) approved precast concrete riser	On Enquiry	Variable

Specifications

General

The cable pit shall be ACO J1000C COVERCOM® SCEC (SL2) - concrete pit & steel lid - full* / split* body with Class D240kN (AS 3996) lids as supplied by ACO Pty Ltd. or equal approved.

The pit is fully tested and assessed on behalf of SCEC. SCEC have subsequently endorsed the lids and pits to SL2 contingent on the use of SCEC (SL3) padlocks to secure the lids.

Materials

The pit body shall be manufactured from fibre reinforced cement concrete with:

Compressive strength: 40MPa

The nominal clear opening shall be 945 x 945mm. Units shall be manufactured with an internal depth of 840mm* / 830mm* for full* / split* body pits.

Lid

The pit shall be covered with a SCEC (SL2) approved tamper evident locking steel lid. All lids must be load certified to AS 3996 and NATA test certificates must be supplied.

Installation

The cable pit shall be installed in accordance with the manufacturer's installation instructions and recommendations.

* delete as applicable

ACO Pty Ltd Australia

Ph: 1300 765 226
www.acoaus.com.au
sales@acoaus.com.au

© August 2025 ACO Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Pty Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.

