

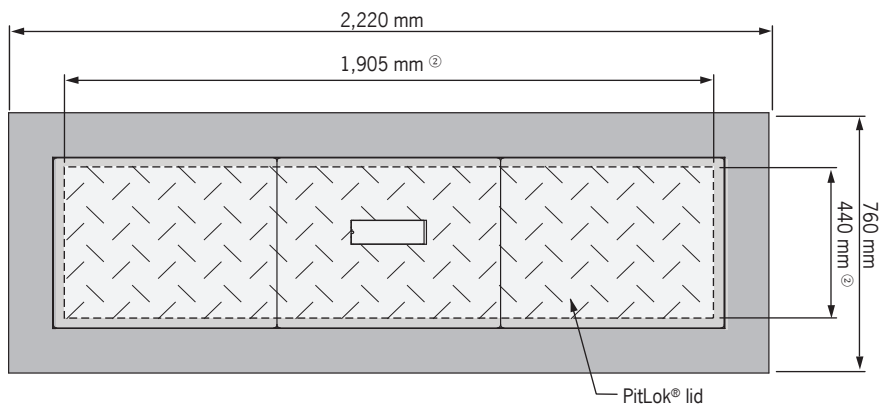




J10P - ACO PITLOK® Scec (SL1) - concrete pit & steel lid system

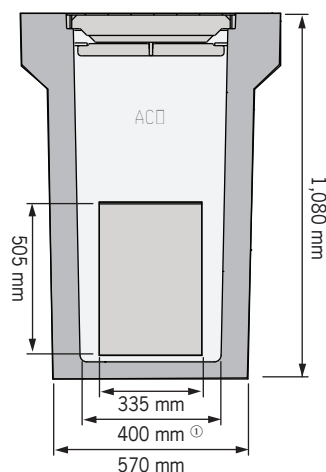

Cable pit - full body

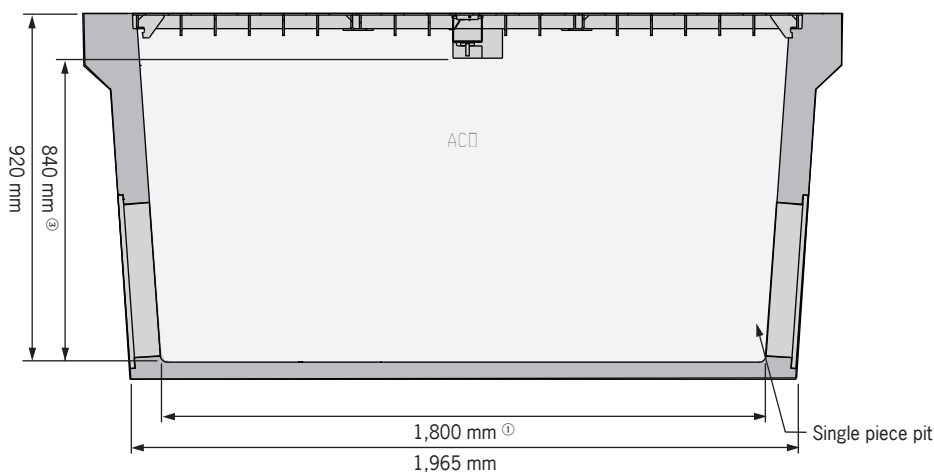

Cable pit - split body

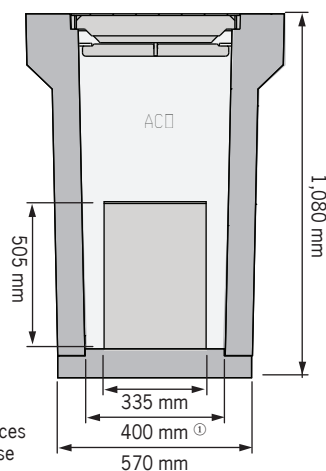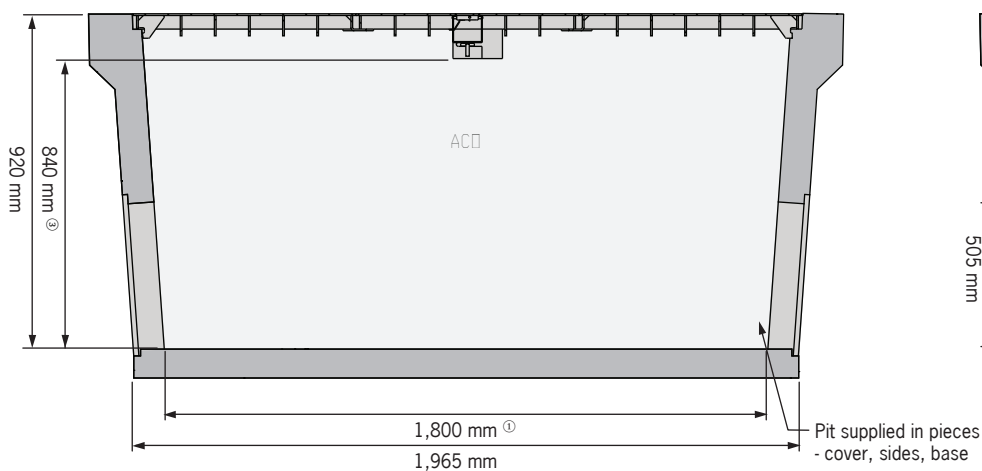

- Key**
- ① Clear working dimension at pit base
 - ② Clear working dimension at pit opening
 - ③ Clear working dimension beneath lid rebate

J10P - ACO PITLOK® SCEC (SL1) - concrete pit & steel lid system

ACO Specification Information

Cable pits and lids

Description	Part No	SEEPL code	Internal clear opening L x W x D (mm)	Total product weight (kg)	Individual lid lifting weight (kg)
J10P - full body pit only	142269		1905 x 440 x 920	1117	
J10P - split body pit only	142270		1905 x 440 x 920	1105	
P10 - steel lid (Class B)	142514	J10P-142514		63	21 (max)
P10 - steel lid (Class D)	143063	J10P-143063		94	32 (max)

Accessories & ancillary items

Description	Part No	Weight kg
Lid Lifting Tool	142232	0.5
ID Plates	On Enquiry	N/A
Route Marker Plates	On Enquiry	N/A
SCEC (SL3) Padlocks	On Enquiry	0.5
Swing Arm	On Enquiry	1
SCEC (SL1) approved precast concrete riser	On Enquiry	Variable

Specifications

General

The cable pit shall be ACO J10P PITLOK® SCEC (SL1) - concrete pit & steel lid - full* / split* body with Class B80kN / D240kN (AS 3996) lids as supplied by ACO Pty Ltd. or equal approved.

The pit is fully tested and assessed on behalf of SCEC. SCEC have subsequently endorsed the lids and pits to SL1 contingent on the use of SCEC (SL3) padlocks to secure the lids.

Materials

The pit body shall be manufactured from reinforced cement concrete with:

Compressive strength: 40MPa

The nominal clear opening shall be 1,905mm x 440mm x 920mm. Units shall be manufactured with an internal depth of 920mm.

Lid

The pit shall be covered with a SCEC (SL1) approved tamper evident locking steel lid. All lids must be load certified to AS 3996 and NATA tested certificates must be supplied.

Installation

The cable pit shall be installed in accordance with the manufacturer's installation instructions and recommendations.

* delete as applicable

ACO Pty Ltd
Australia
 Ph: 1300 765 226
 www.acoaus.com.au
 sales@acoaus.com.au

© August 2020 ACO Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Pty Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.

