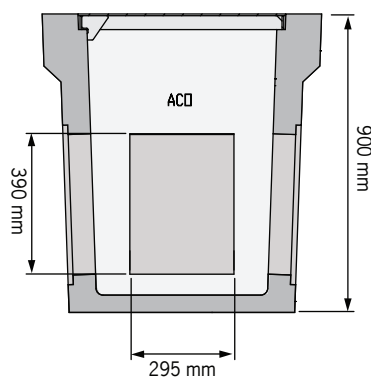
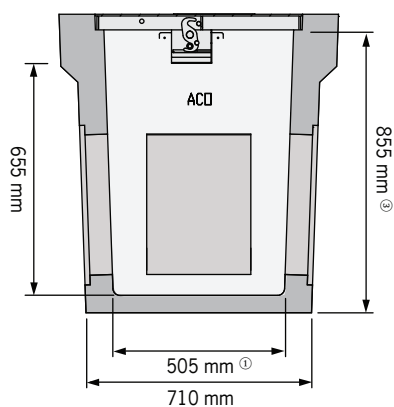
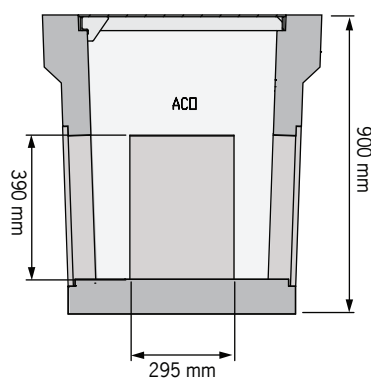
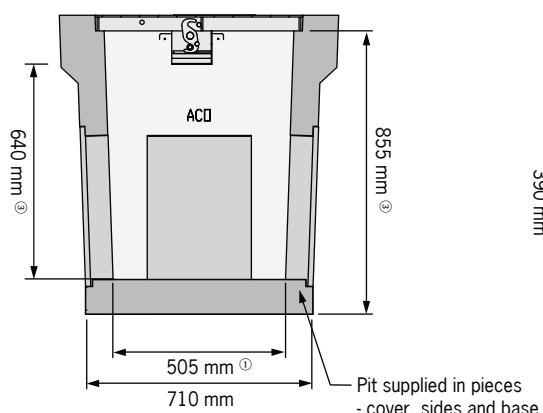
**Cable pit - full body****Cable pit - split body****Key**

- ① Clear working dimension at pit base
- ② Clear working dimension at pit opening
- ③ Clear working dimension beneath lid

ACO CABLEMATE®

J600C - ACO COVERCOM® SCEC (SL2) - concrete pit & steel lid

Cable pits and lids

Description	Part No.	SEEPL Code	Internal Opening L x W x D (mm)	Weight (kg)
J600C - full body pit only	142275	-	545 x 545 x 655	544
J600C - split body pit only	142276	-	545 x 545 x 640	558
P600C - steel lid (Class D)	577014	J600C		31

Accessories & ancillary items

Description	Part No.	Weight (kg)
Lid Lifting Tool	142232	0.5
ID Plates	On Enquiry	N/A
Route Marker Plates	On Enquiry	N/A
SCEC (SL3) Padlocks	On Enquiry	0.5
Swing Arm	On Enquiry	1
SCEC (SL2) approved precast concrete riser	On Enquiry	Variable

Specifications

**General**  
 The cable pit shall be ACO J600C COVERCOM® SCEC (SL2) - concrete pit & steel lid - full\* / split\* body with Class D240kN (AS 3996) lids as supplied by ACO Pty Ltd. or equal approved.

The pit is fully tested and assessed on behalf of SCEC. SCEC have subsequently endorsed the lids and pits to SL2 contingent on the use of SCEC (SL3) padlocks to secure the lids.

**Materials**  
 The pit body shall be manufactured from reinforced cement concrete with:

Compressive strength: 40MPa

The nominal clear opening shall be 545mm x 545mm. Units shall be manufactured with an internal depth of 655mm\* / 640mm\* for full\* / split\* body pits.

**Lid**  
 The pit shall be covered with a SCEC (SL2) approved tamper evident locking steel lid. All lids must be load certified to AS 3996 and NATA test certificates must be supplied.

**Installation**  
 The cable pit shall be installed in accordance with the manufacturer's installation instructions and recommendations.

\* delete as applicable

ACO Pty Ltd  
 Australia  
 Ph: 1300 765 226  
 www.acoaus.com.au  
 sales@acoaus.com.au

© August 2025 ACO Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Pty Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.

