



**Cable pit - full body**

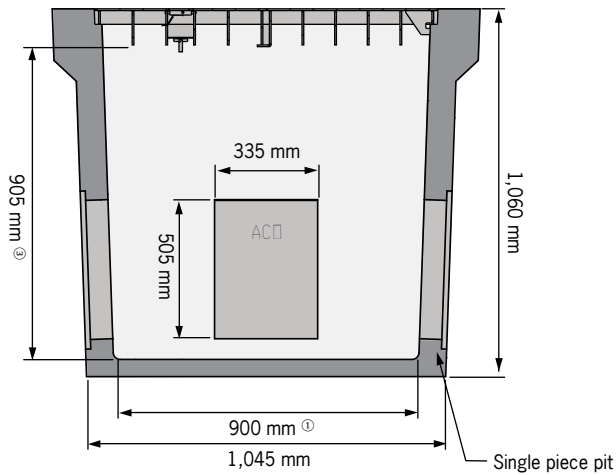

**Cable pit - split body**

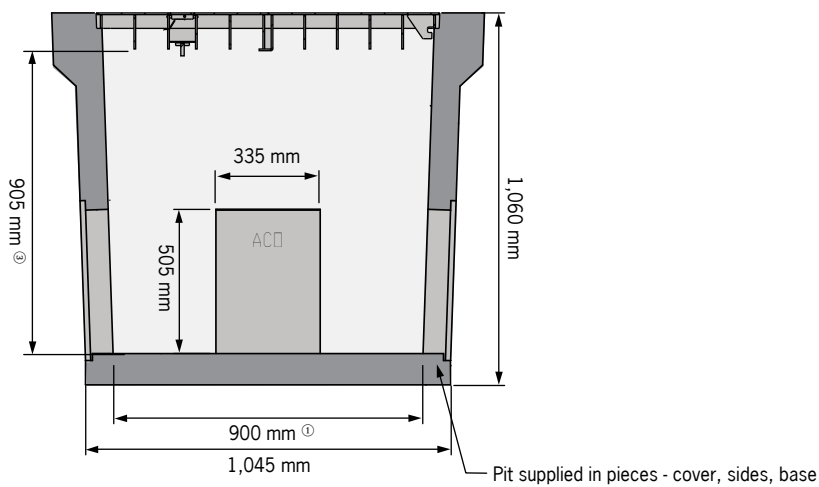

**Key**

- ① Clear working dimension at pit base
- ② Clear working dimension at pit opening
- ③ Clear working dimension beneath lid rebate

ACO Specification Information

**J1000P - ACO PITLOK® SCEC (SL1) - concrete pit & steel lid**

ACO Specification Information

**Cable pit and riser**

Description	Part No	Depth mm	Weight kg
J1000P - ACO PitLok® - concrete pit & steel lid - full body	142251	1,060	930
J1000P - ACO PitLok® - concrete pit & steel lid - split body	142252	1,060	930

**Accessories & ancillary items**

Description	Part No	Weight kg
Lid Lifting Tool	142232	0.5
ID Plates	On Enquiry	N/A
Route Marker Plates	On Enquiry	N/A
SCEC (SL3) Padlocks	On Enquiry	0.5
Swing Arm	On Enquiry	1
SCEC (SL1) approved precast concrete riser	On Enquiry	Variable

**Specifications**

*General*

The cable pit shall be ACO J1000P PITLOK® SCEC (SL1) - concrete pit & steel lid - full\* / split\* body as supplied by ACO Pty Ltd. or equal approved.

The pit is fully tested and assessed by Security Services who conduct tests on behalf of SCEC. SCEC have subsequently endorsed the lids and pits for the 'Protection of Classified Material'. This is contingent on the use of SCEC (SL3) padlocks to secure the lids.

*Materials*

The pit body shall be manufactured from steel reinforced cement concrete with:

Compressive strength: 40MPa

The nominal clear opening shall be 945 x 945mm. Units shall be manufactured with an internal depth of 905mm.

*Lid*

The pit shall be covered with a SCEC (SL1) approved tamper evident locking steel lid.

*Installation*

The cable pit shall be installed in accordance with the manufacturer's installation instructions and recommendations.

\* delete as applicable

**ACO Pty Ltd**  
**Australia**  
 Ph: 1300 765 226  
 www.acoaus.com.au  
 sales@acoaus.com.au



© February 2018 ACO Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Pty Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.